




ULR-8-12GW-DS-75C-SHJ

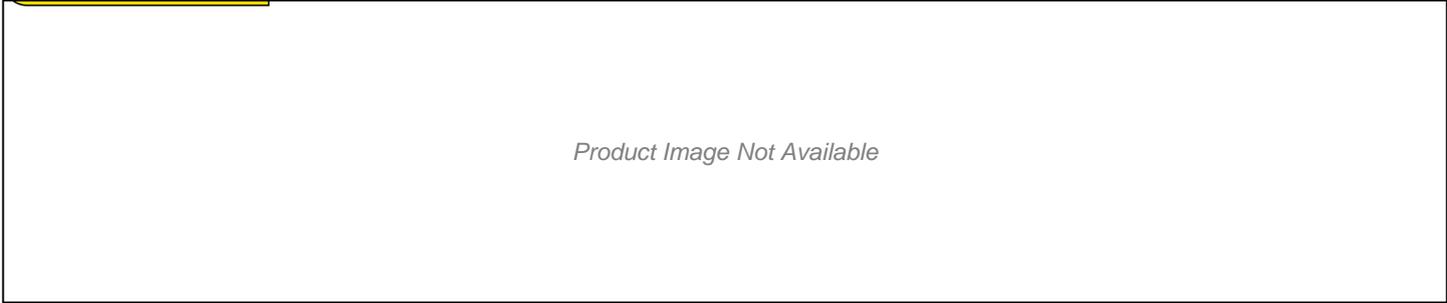

A linear low resin blend that can usually be down gauged 20% when replacing a conventional linear grade film. The film is used for applications where other materials may not be suitable. The resin blend is used to offset the blocking and stretch of the LDPE while maintaining strength and impact resistance.

Specifications

Item #	ULR-8-12GW-DS-75C-SHJ
Package Qty.	75 per case
Mfr. Model #	ULR-8-12GW-DS-75C-SHJ
Gallon	SHJ
Color	WHITE
Gauge	1.14
Barcode	73569203993
Cases per pallet layer	7
Layers per pallet	37
Cases per pallet	259
Cube	0.28
Ship Qty	1
Post Consumer Compliance	20%
Country of Origin	USA
Ship Weight (lbs.)	4.38